



INSTALLATION DRAWING


ACO Polycrete Pty Ltd
1300 765 226
sales@acoaus.com.au

ACO Limited
0800 448 080
sales@aconz.co.nz

DRG #: IX003

GULLY, ADJUSTABLE HEIGHT WITH BONDING FLANGE, INTERNAL FAT, SUSPENDED SLAB, TILE FLOOR, ACO PIPE

www.acogully.com.au
www.acogully.co.nz

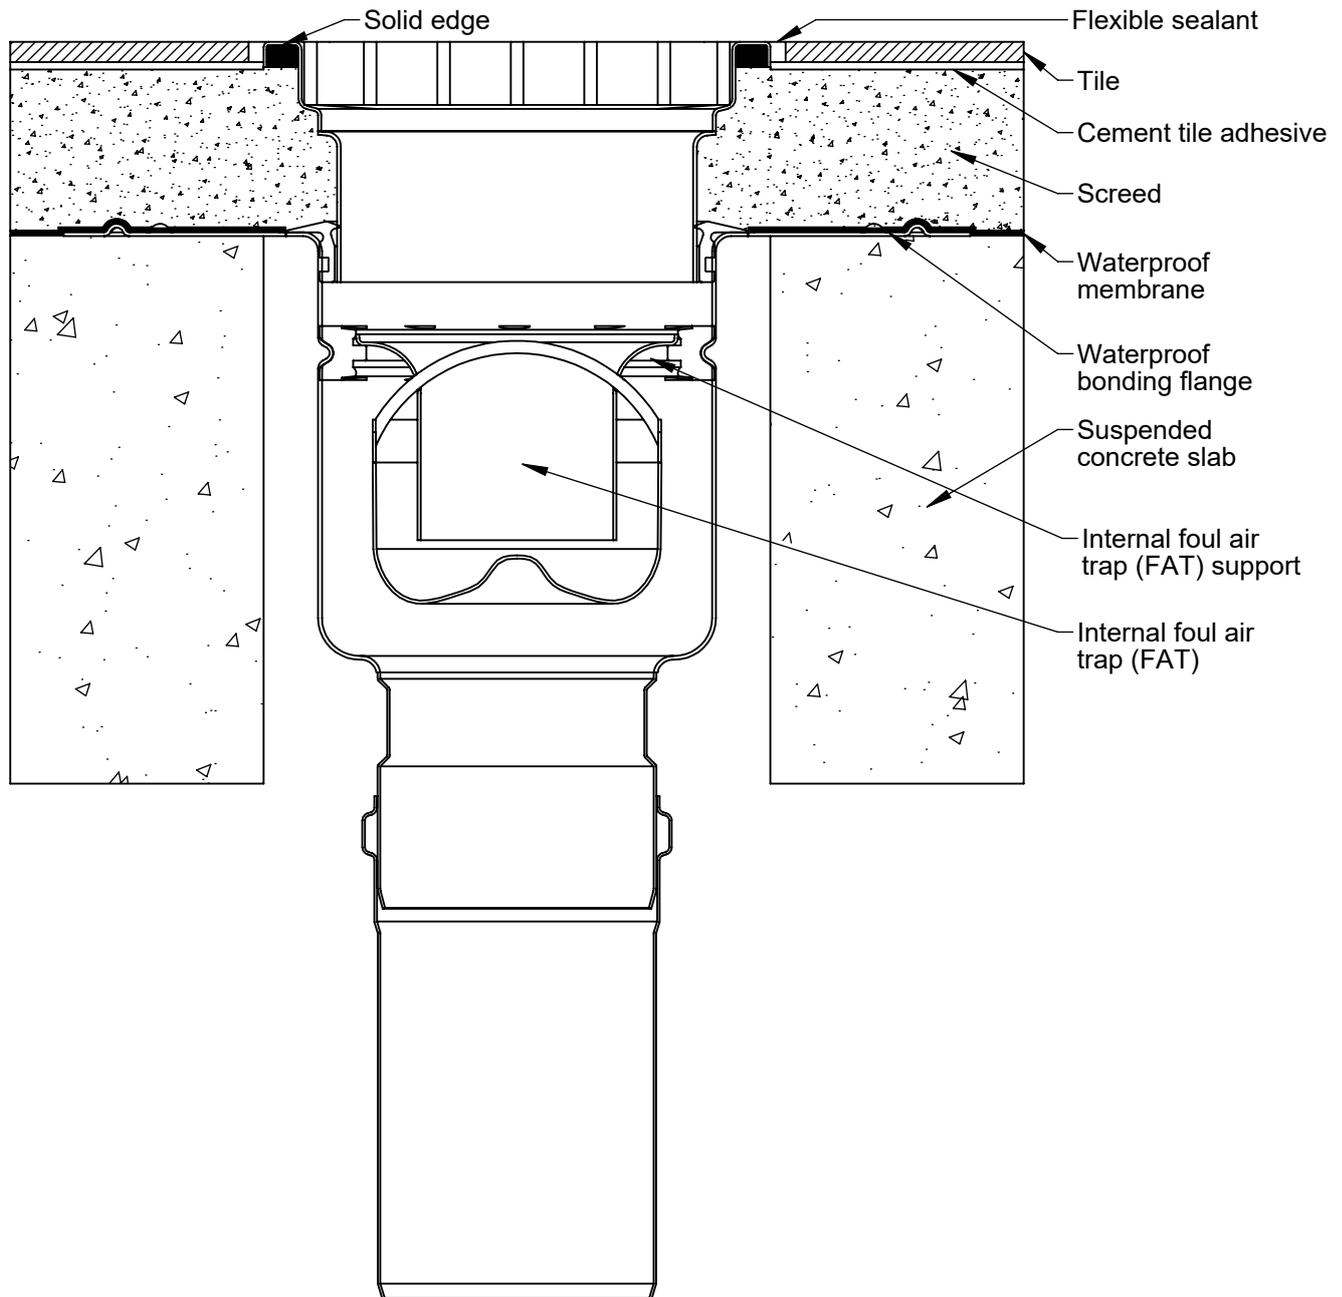

NOTES:

1. Attention: The foul air trap support ring must be placed in the body of gully during installation, otherwise fitting the gully top section might be impossible.
2. These details only provide a practical reference. ACO recommends designers and installers check local legislative standards and practices, or seek specialised engineering advice.

Specification Clause

The floor gullies are to be ACO Gully **157/218, fixed/adjustable** height gullies grade **304/316** stainless steel with vertical outlet as supplied by ACO Polycrete Pty Ltd. All components used within the scope of the systems are shown on Drawing Number/s: ____*. All work should be carried out strictly in accordance with the manufacturer's instructions and the installation details set out on Drawing Number/s: ____*.

Gullies are to be supplied with **internal foul air trap**, solid edge **and strainer basket** part number ____* with **retention chains** part number ____*.

Grates are to be part number ____*.

*Please delete or complete where appropriate